


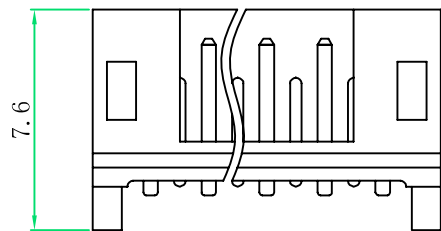
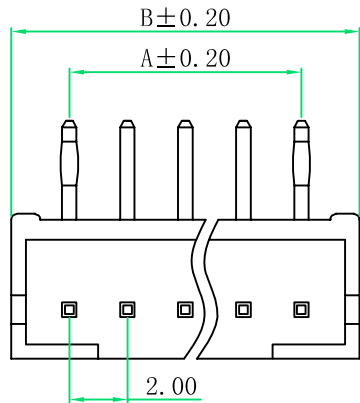
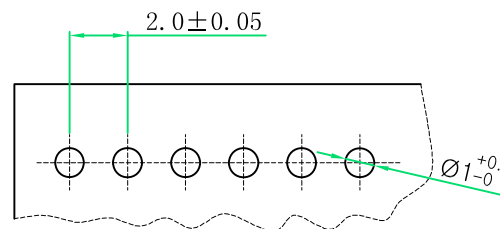
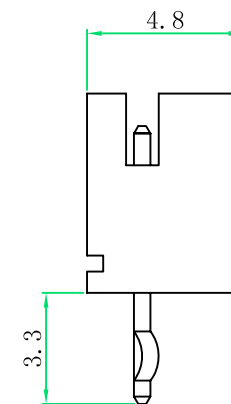


# 卧式

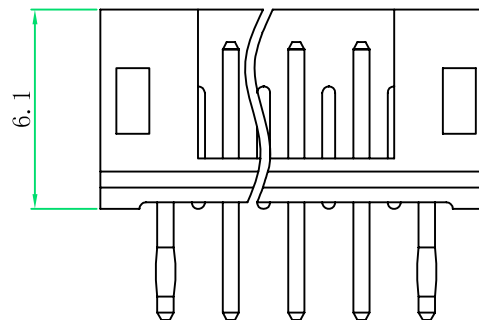

# 立式

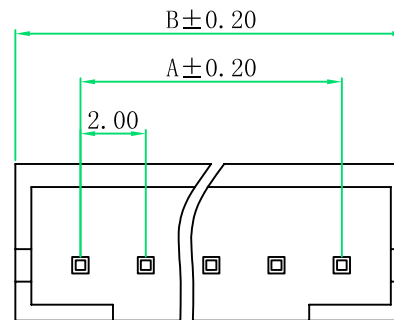

PIN	DIM. (mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00


GENERAL TOLERANCE	
0	±0.35
.0	±0.30
.00	±0.20
.000	±0.10

## SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 2A, AC, DC
- Withstand voltage: 800V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

## WAFER

- Material: Base: Nylon 66 UL94V-2  
pin: Brass Tin-plated

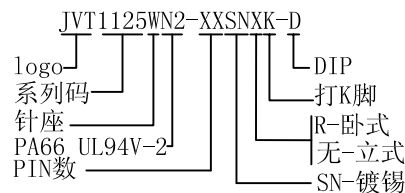

乔业电子有限公司

CHYAO YEE CONNECTORS CO., L TD

核准

审核

绘图

品名

PH2.0 WAFER

bolly

许向毅

料号

JVT1125WN2-XXSNXK-D

图名

045


版本

A

版本

变更内容

日期



单位

mm

比例

1:1

日期

20130517

A

B

C

D

E

F

G

H